


see what Delta can do<sup>SM</sup>


## STEAMBATH INTERFACE

### ■ Transitional Square

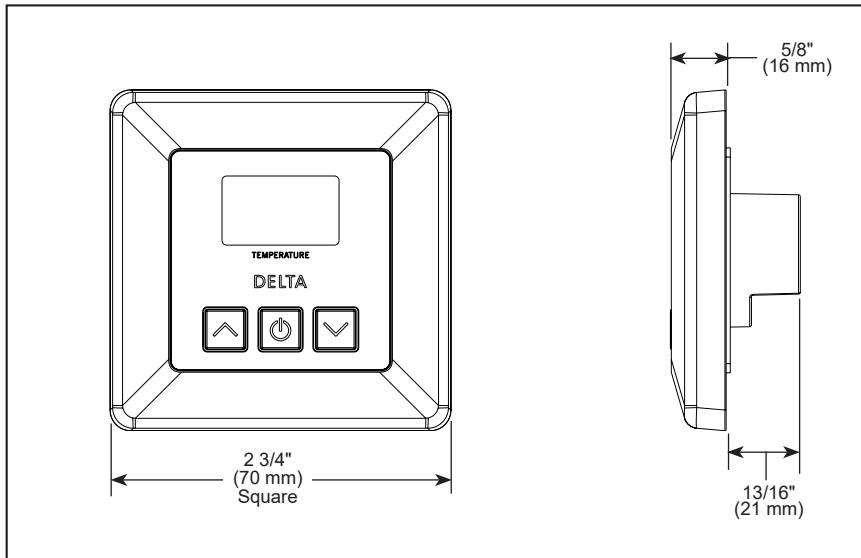

#### EP103305 PACKAGE CONTENTS

Strain Relief Clamp



Silicone Sealant

35-Ft. Multi-Conductor Cable



6-Pin Coupler



▲ Designate Proper Finish Suffix

#### FEATURES:

- Preset time and programmable temperature
- Digital display of ambient and set temperature

#### STANDARD SPECIFICATIONS:

- Surface Mount - 1 1/2" hole required
- Must mount inside the steam room
- The multi-conductor cable should be run through 3/4" conduit to protect cable from damage and to facilitate easy replacement
- Mount control near seating area and not above Steam head
- Control should be mounted 48" above the floor
- Steam head to be mounted 12" to 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.
- Required Electrical Service: Low-voltage connection from 5P-EST series steam generators via multi-conductor cable (supplied with generator)
- Model is not compatible with 5GE-SMP series generators

#### WARRANTY

- Please see separate warranty documentation

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-S-EP103305 Rev. A

#### Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2023 Delta Faucet Company